



AP1000i Full Page Passport Reader

Full Page Passport Reader is a compact, fast and multi-functional document reader based on OCR technology. It is designed for extracting data from ICAO standard travel documents. It provides ideal solutions for identifying Passports, Visa, ID cards, Driver License and other travel documents.



Features



Read ICAO compliant & Non-ICAO documents



Obtain digital data from contactless chips(RFID)



Capture images in white, IR & UV Illuminations



Combine with high accuracy OCR SDK



Applicable for self-service kiosk



Provide OCR customization service

Applications



Airport
Border Control



Security
Access Control



Hotel
Property Management



Finance
Payment Process

AP1000i Specification

Supported Documents




Machine Readable Zone	ICAO 9303 standard compliant documents:
	ID-1 (Identity Card)
	ID-2 (Visa)
Visual Inspection Zone	ID-3 (Passport)
	Customization based on clients' requirements
RFID (Optional)	Read contactless ICs according to ISO/IEC 14443-S (Type A/B)
	Support e-passport Basic Access Control (BAC) & Extended Access Control (EAC)
	Support active/passive authentication
Barcode	1D: Code 128, Code 39, Interleaved 2 of 5
	2D: PDF 417, QR Code, Data Matrix, Aztec Code

Image

Resolution	500 DPI
Illumination	Visible, IR and UV (Optional)
Color Depth	24 bits/pixels
Sensor	CMOS, 5.0 Megapixels (2592*1944)
Image Format	JPG, BMP, PNG
Field of View	127mm*88mm

Software

Supported Operation System	Windows 7,8,10,Vista,XP (32/64 bit WHQL certified)
	Windows Server 2003 & 2008 (32/64 bit)
	Linux Ubuntu, CentOS, RedHat
	Android
Development kit	Complete OCR SDK including DLLs, OCXs, WebSocket, Samples and Demo program
Programming Languages	C#, C/C++, Java, Delphi, Visual Basic 6.0, VB.NET
Security Check	UV Dull Paper Check; MRZ Comparison; Portrait Comparison; IR B900 Ink check.

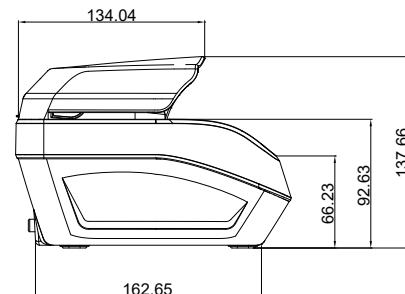

Hardware

Dimension	175*199*140mm(width*depth*height)
Weight	1.25kg (Net)
	2.00kg (Gross)
Interface	USB 2.0
Status LEDs	Power, Ready, Error and Warning
Buzzer	Build-in buzzer
Power	Input: AC 100~240V, 50-60Hz, 0.8A
	Output: DC 12V, 2A
Operating humidity	20%-95%(non-condensing)
Operating temperature	-10 C to 50 C operating
	-20 C to 50 C storage
Warranty	1 year warranty, extensible



天時科技有限公司
ACTION-PLUS CO., LTD
 Tel : (852) 2803 0306
 : (852) 9807 7382
 Website: www.action-plus.com.hk

