

OTEKsys 15" Ecological POS Monitor



Features



1. Spill and Dust proof design in front bezel, meets IP54 requirement ideally for retail and hospitality environment



2. Sturdy and Robust base



3. Two colors logo printing



4. Screen tilting angle freely up to 90 degree vertically



5. Integrate 5 Wires Resistive touch
6. Optional detachable MSR for stock flexibility



7. Optional varies of 2nd display for advertisement application



8. Reuse packing box as storage cabinet patent under applying


Specification

Model	OT15T Series
Cabinet Color	Black or White
Display Size	15"
Active Area	304.1 * 228 mm
Optimal Resolution	1024 * 768
Brightness	250 nits (typ)
Contrast Ratio	600 : 1
Response Time	8 ms (typ)
Viewing Angle(L/R/U/D)	80 / 80 / 80 / 80 (typ)
Input Video Connector	D-Sub 15 pins
Power Consumption	20W
Input Frequency	Horizontal : 31.5-60.2 kHz Vertical : 56.3Hz~75 Hz
Power Supply	DC 12V +/- 10%
Temperature	Operating : 0°C~40°C Storage : -10°C~50°C
Weight (net)	4.67 kgs
Physical Dimension	365.2(W) * 338.6 (H) * 200 (D) mm
Approvals	CE / FCC / CCC / BSMI
Touch Technology	5W Resistive Touch
Wall Mount type	VESA 75 * 75
Warranty	3 years
Optional Items	
Color	Black or White
Wall Mount	Bracket
MSR	3 Tracks
2nd Display	OT07S / OT08S / OT84S / OT84T OT10S
Customer Display	VFD

Product specifications subject to change without prior notice

Made in Taiwan ROC

Dimensions

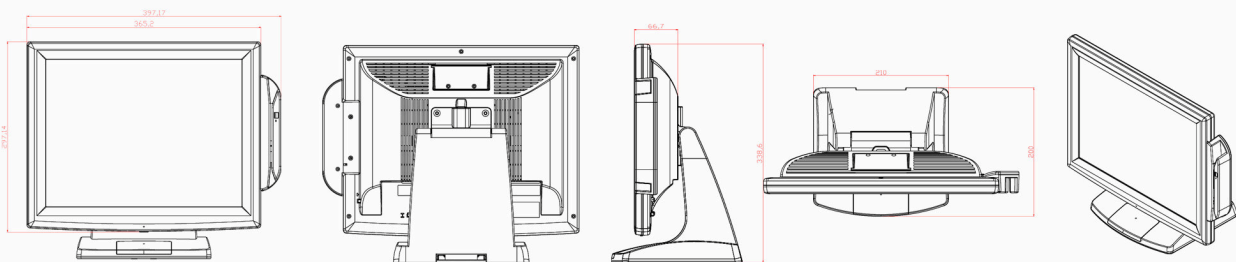

OTEKSYS

OTEK SYSTEM CO., LTD

6F.,
Taipe
TEL :
E-Ma



按此連結 [Click Here](#)

天時科技有限公司
ACTION-PLUS CO., LTD
Tel : (852) 2803 0306
Fax : (852) 2887 2892
Email : sales@action-plus.com.hk
Website: www.action-plus.com.hk

