

**Make your card printing afresh!**  
Enjoyable card printing with easier, faster and safer NUVIA



**nuvia**™





## Compatible with various types of cards

- CR80 (86 x 54mm)
- Non-standard card (70.5 x 25.2mm)
- Non-standard card (68 x 32mm)




## Customizable Printing

- Single or double-sided (Field upgradable option available)
- Sophisticated color sublimation & monochrome thermal transfer
- Rewrite option available



## Easy to Use

- LCD screen available
- Compatible with windows, mac, and linux
- Easy-to-use personalization software "Card Designer X" made by Pointman inclusive
- Dual hopper option available

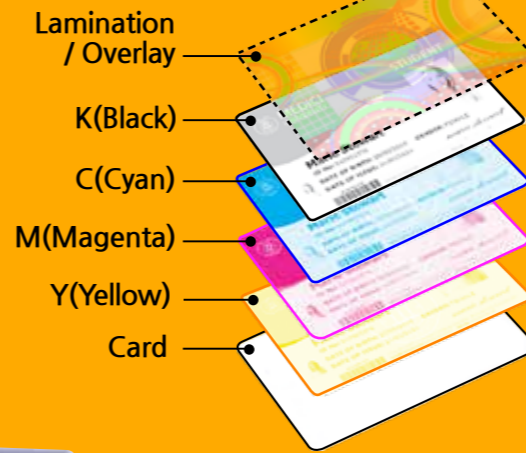

## Expandability

- Seamless compatibility with Pointman laminator for enhanced security and durability
- Varnish / Patch / Custom holograms



## Enhanced Printing

- Up to 200 cards per hour (Single sided color printing)
- 300 dpi
- Variety of color selections
- 2 hopper option available



## Enhanced Security and Durability

- Various encoding options made by Pointman available
- Scramble option available
- Kensington lock option available
- Hopper & top cover lock option available



POINTMAN Card Printer  
NUVIA series Features



MS



IC



RF(NFC)



WIFI



DUAL SIDE





天時科技有限公司  
**ACTION-PLUS CO., LTD**  
 Tel : (852) 2803 0306  
 WhatsApp : (852) 9807 7382  
 Website: www.action-plus.com.hk

## SPECIFICATIONS

ITEM	SUB ITEM		DESCRIPTION
Print	Print Technology		Direct-to-card dye-sublimation / Resin thermal transfer
	Print Capabilities		Single / Dual sided printing
			Additional hopper for the 2nd type cards or the extended q'ty
			Full-color and monochrome printing capability
			Alphanumeric text, logos and digitized signatures
	Print Resolution		300 DPI (N9000/N9100/N9120/N9200), 600 DPI (N6100/N6120), 16.7 Million Color
	Print Speed	Color	Single side (YMCKO) 180 ~ 200 card/hour
			Dual side (YMCKOK) 140 card/hour
		Monochrome	Dual side (YMCKO) 95 cards/hour Monochrome up to 600 cards/hour
	Card		Automatic card feeding : 100 card input (0.76mm) -up to 200 cards with dual hopper option
Output hopper: 50-60 cards (0.76mm)			
Manual single Feed : 1 card input			
Ribbon	Color Ribbon		YMCKO : 200 prints/roll , 250 prints/roll
			YMCKOK : 170 prints/roll , 210 prints/roll
			HalfYMCKO: 400 prints/roll
			UCYMCK : 220 prints/roll or 270 prints/roll
	Monochrome Ribbon		K: 1,000 prints/roll (Blue, Red, Green, White, Metallic Gold, Metallic Silver), K: 1,500 prints/roll (Black)
			KO : 500 prints/roll , 550 prints/roll
			SCRATCH : 1,200 prints/roll , 1,300 prints/roll
			SOKO : 300 prints/roll , 350 prints/roll
			WB : 500 prints/roll , 550 prints/roll
Printer Encoding Option	Magnetic Stripe Encoding		ISO 7811 (Track 1, 2, 3) , JIS II. Coercivity: HiCo/LoCo
	Contact Smart Card Encoding		ISO7816, EMV Level 1(PC/SC or Serial)
	Contactless Smart Card Encoding		Mifare, ISO 14443 A / B, Desfire, NFC, Felica (PC/SC or Serial) *Other encoding options are available upon request
	SAM		PLCC 1 (Extra-1 Sockets), SIM 4 sockets
	Mobile Chip Card		ISO 7816
	Scanner		CIS (300/600 dpi)
Printer Specifications	Dimensions	N9000	184 (W) × 305.6(L) × 228(H)mm
		With Hopper	184 (W) × 366(L) × 228(H)mm
	Weight	N9000	3.7kg
		With Hopper	4.5kg
	Power	Input	100-240V 50/60Hz 1.7A
		Output	DC 24.3V 2.5A
	Temperature	Operating	15~35°C / 59~ 95°F (Color printing), 15~40°C / 59~ 104°F (Mono printing)
		Storage	-10~60°C / 14~140 °F
	Humidity	Operating	20 ~ 65 % non-condensing
		Storage	20 ~ 70 % non-condensing
	Font		True Type Fonts via Windows Drivers
	Memory		128MB RAM
	Interface		USB2.0 (High-Speed), Built in 10/100 Ethernet
	Operation System for Printer Driver		Windows ®10/8.1/8/7/Vista/XP/Server 2012, 2012 R2, 2008, 2008 R2, 2003
	Certifications		FCC Class A, CE (EN 55022 Class A, EN 55024), CCC, KCC, Energy STAR, RoHS
	Security		Kensington ® physical lock / Hopper lock(optional), Printer lid lock(optional)
Software		Card Designer 2.0™	
Limited Warranty		1 year	

Specifications are subject change without notice